




PRESSALIT®

Product Item number	Changing table, 31.5" x 55.1", electrically height adjustable, with sanitary appliances R8684000
Color	VVS: 777636320 NRF: 7501983 EAN: 5708590338439 HMI: 100178 White
Product description	 <p>Pressalit offers a wide variety of changing tables designed for use in daycare facilities. The tables are available in several sizes and models, either free standing or wall-hung. The fold away feature in wall-hung tables is useful where space is limited. The wall-hung tables with low start are essential for daycare or preschool facilities. Even toddlers can climb onto the table themselves, without the staff lifting them.</p> <p>Changing table, wall-mounted, low start, with sink/faucet, 31.5" x 55.1". With motor and transformer, height adjustable from 11.8" - 39.4", with hand control and safety stop function. Molded worktop with integrated sink, incl. lever operated faucet, feed/waste system and 2 wire baskets. Materials: ABS plastics, synthetic acrylic and powder-lacquered steel. Excl. fixing kit.</p>
Adjustability	Height adjustable
Adjustment height	27,58 inch
Product capacity	Max load: 165 lbs.
Speed up	Speed up: 1,5 inch/s Speed down: 1,5 inch/s
Noise level	48 dB
Materials	Lifting unit and baskets: Powder-coated steel. Countertop: ABS with acrylic. Waste pipe: Polyurethane, PVC and steel. The flexible waste pipe is very resistant to both chemical and physical influences. It is flame retardant and withstands temperatures from -30°C to +110°C.

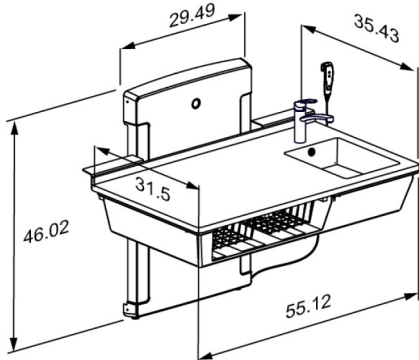

PRESSALIT®

Product	Changing table, 31.5" x 55.1", electrically height adjustable, with sanitary appliances
Item number	R8684000
Ergonomy	The smooth height adjustment ensures that it is always possible to set the table at an ergonomically correct height. The table descends to a very low position, which offers the advantage that toddlers can easily climb up and down themselves. Thereby unnecessary lifting is avoided.
Features	Easy-to-clean surfaces ensure optimum hygiene. Integrated sink and tap. Integrated safety system prevents entrapment.
Mains connection (V)	230
Actuator (motor)	LA31 Deskline (Linak), 2500N, IPX1
Control box	CBD6 (Linak), IP20
Wired remote control	HB30 (Linak), IPX4
Power consumption (maximum load)	Power consumption by maximum load: 96 W Power consumption by standby: 0,1 W
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date.



PRESSALIT®











Product	Changing table, 31.5" x 55.1", electrically height adjustable, with sanitary appliances
Item number	R8684000
Cleaning	<p>This product should be cleaned with hot water or a mild cleaning solution. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p>DISINFECTANTS: Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70%</p> <p>NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p>



PRESSALIT®

Product	Changing table, 31.5" x 55.1", electrically height adjustable, with sanitary appliances
Item number	R8684000

Mounting in different wall types

	Concrete >B25 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Solid Brick >= Mz12 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Solid Sand Lime Brick >= Hlz12 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Aerated Concrete P4 V8658 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs GB14. To be ordered separately.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. NB! Plugs are not needed. To be ordered separately.	



PRESSALIT®

Product Item number	Changing table, 31.5" x 55.1", electrically height adjustable, with sanitary appliances R8684000
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood</p> <p>Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. SnapTight or WingIt anchors or similar.</p>
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (.08 inch)</p> <p>Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. SnapTight or WingIt anchors or similar.</p>
	<p>Drywall (2 x 12,5 mm) water-resistant</p> <p>Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.</p>

pressalit.com

Pressalit A/S
 Pressalitvej 1
 DK-8680 Ry
 Tel.: +45 8788 8788
 Fax: +45 8788 8789
 E-mail: pressalit@pressalit.com

PRESSALIT®